


# KEY URECON SLT FLOORING

Technical Data Sheet

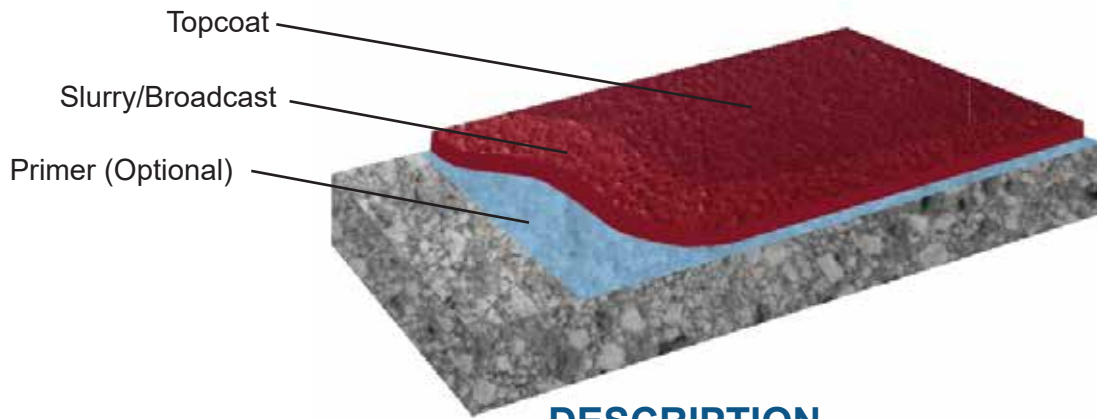

## DESCRIPTION

**KEY URECON SLT** is a 3/16" – 1/4" seamless, urethane modified, cementitious slurry broadcast system that produces a dense, non-porous floor that is chemical and moisture resistant. Ideal for medium to heavy duty traffic areas, **KEY URECON SLT** exhibits high impact resistance and excellent thermal shock and chemical resistance. **KEY URECON SLT** is finished with various topcoat options to provide the required project performance. In addition, as a system tolerant to high moisture content in the concrete substrate, **KEY URECON SLT** is a solution for many moisture problems. **KEY URECON SLT** can be installed with an integral cover base for areas requiring seamless wall to floor coatings. **KEY URECON SLT** system provides a durable, long lasting surface that resists chemical corrosion, abrasion, and impact.

## KEY ADVANTAGES

- Excellent chemical, wear, and impact resistance
- Unaffected by moisture vapor transmission for on or below grade applications
- May be installed over 5 day old concrete
- Thermal shock resistant
- Hygienic/antimicrobial–will not support bacterial or fungal growth
- Meets USDA requirements for incidental food contact
- Safe for food industry–non-absorbent, non-tainting, washable
- VOC (EPA Method 24) SCAQMD compliant
- Meets USGBC LEED criteria for low VOC
- Bio-based material, polyol component manufactured using rapidly renewable agricultural content
- Fast cure time
- Low odor application
- Safe (slip resistant finishes)
- Chemical resistant finishes are available

## TYPICAL USES

- Restrooms & locker rooms
- Kitchens
- Freezers & coolers
- Cafeterias
- Laboratories
- Manufacturing & food processing areas
- Bottling & packaging areas
- This 3/16" to 1/4" system is ideal for all areas requiring a chemical resistant, sanitary and high impact finish
- Numerous other uses–Consult with Key Resin

## PHYSICAL PROPERTIES

Test Name	Method	Value
Color		Refer to Color Chart
VOC (Volatile Organic Content)	EPA Method 24	Refer to Individual Product Component Data Sheet
Adhesion to Concrete	ASTM D4541	300-400+ psi (Concrete Failure, varies by concrete strength)
Compressive Strength	ASTM C579	7,500 psi
Flexural Strength	ASTM C580	2,600 psi
Tensile Strength	ASTM C307	1,100 psi
Hardness, Shore D	ASTM D2240	80-85
Thermal Shock Resistance	ASTM C884	Passes
Thermal Expansion Coefficient	ASTM C531	$2 \times 10^{-5}$
Coefficient of Friction		Contact Key Resin
Abrasion Resistance	ASTM D4060, CS17 Wheel, 1000 cycles	32 mg Varies by topcoat
Flammability	ASTM D635	Self-extinguishing over concrete
Water Absorption	ASTM D570	Nil
Impact Resistance	MIL-D-3134J	Withstands 16 ft-lbs without cracking, delamination or chipping

# KEY URECON SLT FLOORING

Technical Data Sheet



## APPLICATION

### SURFACE PREPARATION

Surface Preparation is the most critical portion of any successful resinous flooring system application. All substrates must be properly prepared as outlined in **Key Resin Technical Bulletin #1. KEY URECON SLT** may be installed over 5 day old concrete. **Important:** Be aware that concrete substrates will continue to contract (shrink) during early cure stage possibly causing random shrinkage cracks in the concrete or covered contraction (sawcut) joints to crack, resulting in reflective cracks in the **KEY URECON SLT** topping—contact Key Resin Technical Service for recommendations.

Concrete substrates should be a minimum of 3000 psi compressive strength and 225 psi tensile strength. Substrates should be sloped to drain in wet areas to prevent standing water or chemicals.

Work must be performed by experienced contractors. The **Key Resin Technical Service Department** is available to answer any questions.

### INSTALLATION

**KEY URECON SLT** material components are mixed on site. Refer to the detailed installation instructions document and **Key Resin Technical Service**.

### CLEAN UP

Clean skin with soap and water. Tools and equipment should be cleaned with xylene or lacquer thinner. Consult Safety Data Sheet (SDS) for safety and health precautions.

## SYSTEM OPTIONS

- Integral Cove Base
- Chemical Resistant topcoats
- Aliphatic Urethane topcoats
- Polyaspartic topcoats
- MMA topcoats
- Contact Key Resin Technical Service for recommendations

## TECHNICAL SERVICE

**Key Resin Company** provides services and consultations on material selection, specification, troubleshooting, and other information on the proper repair and protection of concrete surfaces. Key Resin Sales/Technical Representatives are available to assist. Telephone **888.943.4532** or visit **www.keyresin.com**.

## MAINTENANCE

After completing the application of **KEY URECON SLT**, the installer should provide the owner with maintenance instructions. **KEY URECON SLT** is easily cleaned with neutral soaps or detergents. Routine mechanical scrubbing using the appropriate pad is recommended for all surfaces having a slip resistant texture. Refer to **Key Resin Technical Bulletins #3** and **#3-A** for additional recommendations.

## AVAILABILITY

**Key Resin** materials are available throughout the United States and a number of other countries. Contact the **Key Resin Representative** in your area for details.

## WARRANTY

**Key Resin Company** ("Key") warrants for a period of one (1) year that its products will be free of manufacturing defects and will be in conformity with published specifications when handled, stored, mixed, and applied in accordance with recommendations of Key. If any product fails to meet this warranty, the liability of Key will be limited to replacement of any non-conforming material if notice of such non-conformity is given to Key within (1) one year of delivery of materials. Key may in its discretion refund the price received by Key in lieu of replacing the material. No customer, distributor, or representative of Key is authorized to change or modify the published specifications of this warranty in any way. No one is authorized to make oral warranties on behalf of Key. In order to obtain replacement or refund the customer must provide written notice containing full details of the non-conformity. Key reserves the right to inspect the non-conforming material prior to replacement. EXCEPT FOR THE EXPRESSED WARRANTY STATED ABOVE, THERE ARE NO OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING WITHOUT LIMITATION, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR PURPOSE. KEY'S OBLIGATION SHALL NOT EXTEND BEYOND THE OBLIGATIONS EXPRESSLY UNDERTAKEN ABOVE AND KEY SHALL HAVE NO LIABILITY OR RESPONSIBILITY TO THE PURCHASER OR ANY THIRD PARTY FOR ANY LOSS, COST, EXPENSE, DAMAGE OR LIABILITY, WHETHER DIRECT OR INDIRECT, OR FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.



Rev 3/18/2025 v2.1

**CORPORATE OFFICE / EASTERN US / INTERNATIONAL**

4050 Clough Woods Drive . Batavia, OH 45103  
513.943.4225 888.943.4532 www.keyresin.com

**WESTERN US**

4330 N. 43rd Avenue, Suite B4, Phoenix, AZ 85031  
602.523.9353