



Flowseal Ultra Flakes (30 - 40 mils)

A decorative resin system containing color stable flakes in a Polyurea binder.



Decorative:

Available in vibrant flake color mixes that can be matched to neighboring interiors.



Easily Cleaned:

Minimal surface joints ensure the floor is easy to clean and sanitize.



Wear Resistant:

Excellent scratch and wear resistance to foot and rubber-wheeled cart traffic.



Stain Resistant:

Protects against spillages in grocery stores, tasting rooms and food service areas.



Chemical Resistant:

Protects against acids, alkalis, caustic soda, salt solutions, oils, fats and sanitizers.

Standard Colors:



Scarlet



Cobblestone



Quicksilver



Domino



Ice Blue



Midnight



Green Bay



Desert Tan

TENSILE STRENGTH:

ASTM D 638	> 1,250 psi
------------	-------------

TENSILE ELONGATION:

ASTM D 638	25%
------------	-----

SLIP RESISTANCE:

PTV BS 7976-2 (Using TRRL Rubber Slider)	Dry: 56 Wet: 23
---	--------------------

ABRASION RESISTANCE:

ASTM D 4060 CS 17 Wheel, 1000 cycles	0.040g loss
---	-------------

SURFACE HARDNESS:

Koenig Hardness Test	> 180 secs
----------------------	------------

IMPACT RESISTANCE:

ISO 6272	2.2 lb weight > 70 inch 4.4 lb weight > 59 inch
----------	--

WATER ABSORPTION:

ASTM D 570	0.0008%
------------	---------

BOND STRENGTH:


Greater than cohesive strength of 3,000 psi concrete, > 220 psi

TEMPERATURE RESISTANCE:

Continuous Exposure:	Up to 165°F
----------------------	-------------

VOC:	12 g/l
------	--------

SPEED OF CURE:	50°F	70°F	90°F
Light Traffic	8 hrs	4 hrs	2 hrs
Full Traffic	48 hrs	24 hrs	12 hrs
Full Chemical Cure	6 days	3 days	2 days

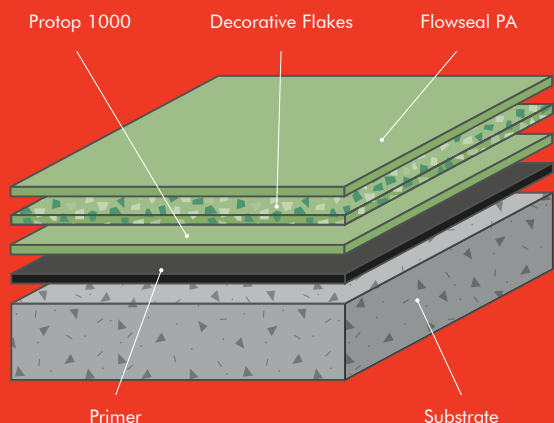

The applied colors may differ from the examples shown.
For a full color chart and samples, contact your local Key Resin Company office.

www.flowresinamericas.com

Products Included In This System

Primer:	Flowprime at 200 sq ft/gal
Base:	Protop 1000 at 160 sq ft/gal
Flakes:	Colored Flakes at 0.15 lbs/sq ft
Sealer:	Flowseal PA at 175 sq ft/gal

Additional primer and membrane options are available for damp surfaces, crack bridging and high movement. The base coat can be pigmented by adding 2 pigment packs per 3 gallon units.

Glass beads can be incorporated in the sealer to provide better slip resistance. Additional topcoats can be applied for a smoother surface. For topcoat options please consult our Technical Advisors.

Coverages listed are theoretical, actual coverages may vary based on substrate, temperature and site variations.

Installation

Installation should be carried out by a Key Resin Company preferred contractor with a documented quality assurance note. Obtain details of our preferred contractor network from our customer service team or by enquiring through our website. Detailed application instructions are also available upon request.

Substrate Requirements

Concrete or screed substrate should have a minimum of 3,000 psi compressive strength, free from laitance, dust and other contamination. The substrate should be dry to ASTM requirements and free from excessive moisture vapor transmission.

Technical Profile

The figures and test results shown overleaf are typical properties achieved in laboratory tests at 75°F and at 50% Relative Humidity.

Aftercare, Cleaning & Maintenance

Clean regularly using a single or double headed rotary scrubber / drier with a mildly alkaline detergent.

Environmental Health & Safety

The finished system is assessed as non-hazardous to health and the environment. The long service life and seamless surface reduce the need for repairs and maintenance. Environmental and health considerations are controlled during manufacture and application of the products by Key Resin Company staff and fully trained application teams.

Warranty

Key Resin Company products are guaranteed against defective materials and manufacture and are sold subject to our standard 'Warranty, Terms and Conditions of Sale', copies of which can be obtained on request. Warranty does not cover suitability, fit for purpose or any consequential or related damages. Please review warranty in detail before installing the products.

Disclaimer

Any recommendation or suggestion relating to the use of products manufactured by Key Resin Company, whether in its technical literature or in response to a specific inquiry, is based upon data believed to be reliable, however the products and information are intended for use by applicators having requisite skill and know-how in the industry and therefore it is for the applicator to satisfy itself of the suitability of the products for its own particular use and it shall be deemed that the applicator has done so at its sole discretion and risk.

[06/09/25 v2.1]

FlowResin
Manufactured by Key Resin
4050 Clough Woods Dr, Batavia, OH 45103
Toll Free: 1 (888) 943-4532
Email: sales@keyresin.com



www.flowresinamericas.com